

Power-Kleen V

pH Controlled Wash Multi Metal


Lower pH, High Rinsing, Low Foaming Detergent Safe for New Manufacturing, No Residue, Synthetic Products

GENERAL DESCRIPTION

Power-Kleen V is a 100% active concentrated cleaner designed specifically for high pressures washing of Aluminum, Iron, Steel and all Multi-metals. It is very effective at a range of temperatures for cleaning new manufacturer parts, synthetic products (oils and grease), unique soils (tree sap) and applications with high rinseability requirements. Power Kleen V is safe for use on all metals, rubber or plastics requiring no extra steps for most applications.

ADVANTAGES

- High Rinseability is perfect for new manufacturing or precise cleaning applications such transmission rebuild
- In most applications the metal surface is cleaned to original appearance or better.
- 100% Active Concentrated chemical with no fillers
- Formulated with rust inhibitors to protect your washer & unrinsed parts even at a lower pH.
- Low foaming with built-in defoamant and formulated to maintain effectiveness in hard water.
- An Alkaline spray washing detergent with a controlled pH of 11 to 11.5 meets most plant safety requirements.

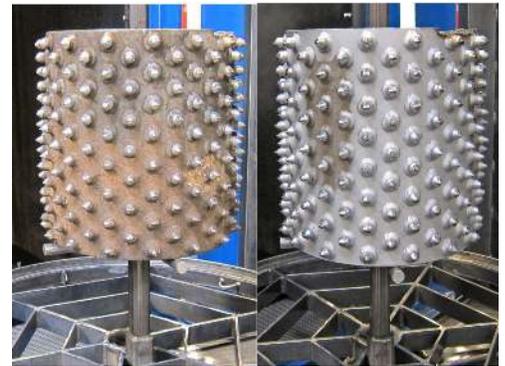

BEFORE

AFTER

APPLICATION GUIDELINES

Power-Kleen V is designed for use at low concentrations:

- Washing light soils/High Rinsing - 9 oz/gal to 11 oz/gal
- Washing heavier soils - 10 oz/gal to 12 oz/gal
- Useable temperature range - 140° - 175°. Higher temperatures increase effectiveness.
- Incoming Water Quality - 0-50 ppm Hardness

PHYSICAL PROPERTIES (TYPICAL DATA)

Form.....Liquid
Color (concentrate)Light Amber

pH range of Working Solution.....11-11.5
pH of concentrate.....Below 12



2450 Adie Road, Maryland Heights, MO 63043 USA
Ph 800-543-6278 Fax 314-567-6318
E-mail service@stingwash.com Website www.stingray.com

MIXING INSTRUCTIONS

For StingRay / MART Parts Washers: Open and secure the Parts Washer door. Carefully and slowly pour the appropriate amount of detergent per gallon of system capacity over the door frame and through the expanded metal internal reservoir cover in the washer. Close the washer door and start the pump to mix the detergent.

For all other cleaning equipment: Add chemical carefully and as instructed by the machine manufacturer. Avoid “dumping” of chemical directly into washer reservoir. Violent exothermic (heat released) reactions, splashing of heated chemical solutions and the premature release of fumes may occur. If chemical must be added to the solution, slowly pour chemical into solution while continuously mixing.

HEALTH AND SAFETY

Avoid contact with chemical and solution. Avoid inhaling fumes. Instructions can also be found on the Power-Kleen V label, StingRay Tech Services Website or reference the StingRay / MART Parts Washer Operating Manual.

Get the most recent MSDS from our website at www.stingrayservice.com or call StingRay Tech Services

PACKAGING

Part Number	Package Size
85168	5 gal Pail
85169	55 gal Drum

- Shipping: Ships UPS or Truck
- For additional information, please contact:
StingRay Tech Services at 1-800-543-6278 or visit our Website: www.stingrayservice.com

MONITORING CONCENTRATION

Power-Kleen V concentration should be monitored by titration using the Power-Kleen Titration Kit P/N 22200.

This test, which consists of an “indicator” (Phenolphthalein) and a “titrant” (15% acid), determines the concentration of POWER KLEEN V in the solution. **Caution:** Wear eye protection and gloves during the test.

Notes: Cool solution to room temperature.

For better accuracy and repeatability:

- Run the solution through a coffee filter to remove impurities.
- Clean the Test Tube thoroughly before each use.
- Hold the acid bottle vertically to ensure consistent droplet size.

Procedure:

- Pour 50 ml of washer solution to the mark on the Test Tube.
- If solution is murky, add small amount of water for clarification.
- Add 5 drops of Phenolphthalein Indicator. Solution will turn pink.
- Add acid, one drop at a time, and count the drops while swirling the solution in the test tube until pink color is completely gone.
- Reading: Approximate Concentration of Power Kleen V, expressed as oz/gal, equals (number of drops) divided by 1.0. Concentration Formula: Drops of Acid / 1.0 = oz per gallon
- Pour test solution into machine reservoir, wash Test Tube, and repeat to confirm results.



Titration Kit #22200

Drops of Acid	8	9	10	11	12
Power-Kleen V Ounces per gallon	8	9	10	11	12

Acid Count VS Concentration Chart: Count Drops of Acid, find concentration in table.